


FH型標準規格

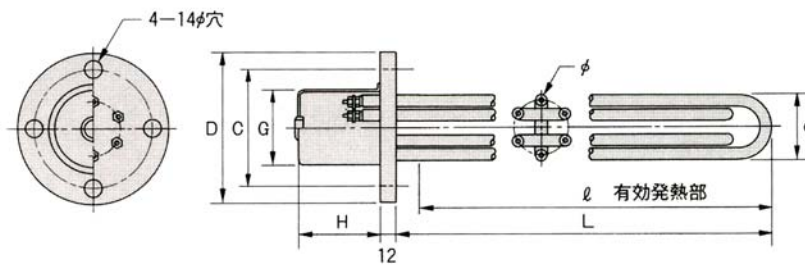

<標準タイプ一覧>

液体の種類	型式	電圧 V	容量 kW	ヒータ 本数	L mm	l mm	d mm	φ φ mm	G φ mm	H mm	E mm	D φ mm	C mm	電力密度 W/cm ²	ヒータ 材質
油 (Oil)	FHO-1100	100	0.5	1	280	250	38	10	60	60	12	120	95	3.5	鉄 (Iron)
	FHO-1200	100	1.0	2	280	250	38	10	60	60	12	120	95	3.6	
	FHO-1300	200	1.0	2	280	250	38	10	60	60	12	120	95	3.6	
	FHO-1400	200	1.5	2	400	370	38	10	60	60	12	120	95	3.6	
	FHO-1500	200	2.0	2	530	500	38	10	60	60	12	120	95	3.6	
	FHO-1600	200	2.0	3	380	350	45	12	65	70	14	130	105	3.4	
	FHO-1700	200	3.0	2	780	750	38	10	60	60	12	120	95	3.6	
	FHO-1800	200	3.0	3	530	500	45	12	65	70	14	130	105	3.5	
	FHO-1900	200	4.0	3	680	650	45	12	65	70	14	130	105	3.6	
	FHO-2000	200	5.0	3	800	770	65	12	85	80	14	155	130	3.0	
	FHO-2100	200	7.0	3	1,100	1,070	65	12	85	80	14	155	130	3.0	
FHO-2200	200	10.0	3	1,550	1,520	65	12	85	80	14	155	130	3.1		
水 (Water)	FHW-1100	100	0.5	1	140	110	38	10	60	60	12	120	95	7.0	銅 (Copper) ステンレス (sus)
	FHW-1200	100	1.0	2	160	130	38	10	60	60	12	120	95	7.0	
	FHW-1300	200	1.0	2	160	130	38	10	60	60	12	120	95	7.0	
	FHW-1400	200	1.5	2	215	185	38	10	60	60	12	120	95	7.1	
	FHW-1500	200	2.0	2	275	245	38	10	60	60	12	120	95	7.0	
	FHW-1600	200	2.0	3	170	140	45	12	65	70	14	130	105	7.1	
	FHW-1700	200	3.0	2	385	355	38	10	60	60	12	120	95	7.0	
	FHW-1800	200	3.0	3	235	205	45	12	65	70	14	130	105	7.0	
	FHW-1900	200	4.0	3	295	265	45	12	65	70	14	130	105	7.1	
	FHW-2000	200	5.0	3	355	325	65	12	85	80	14	155	130	7.1	
	FHW-2100	200	7.0	3	485	455	65	12	85	80	14	155	130	7.1	
FHW-2200	200	10.0	3	670	640	65	12	85	80	14	155	130	7.0		

●ご希望により特殊材質も設計製作致します